

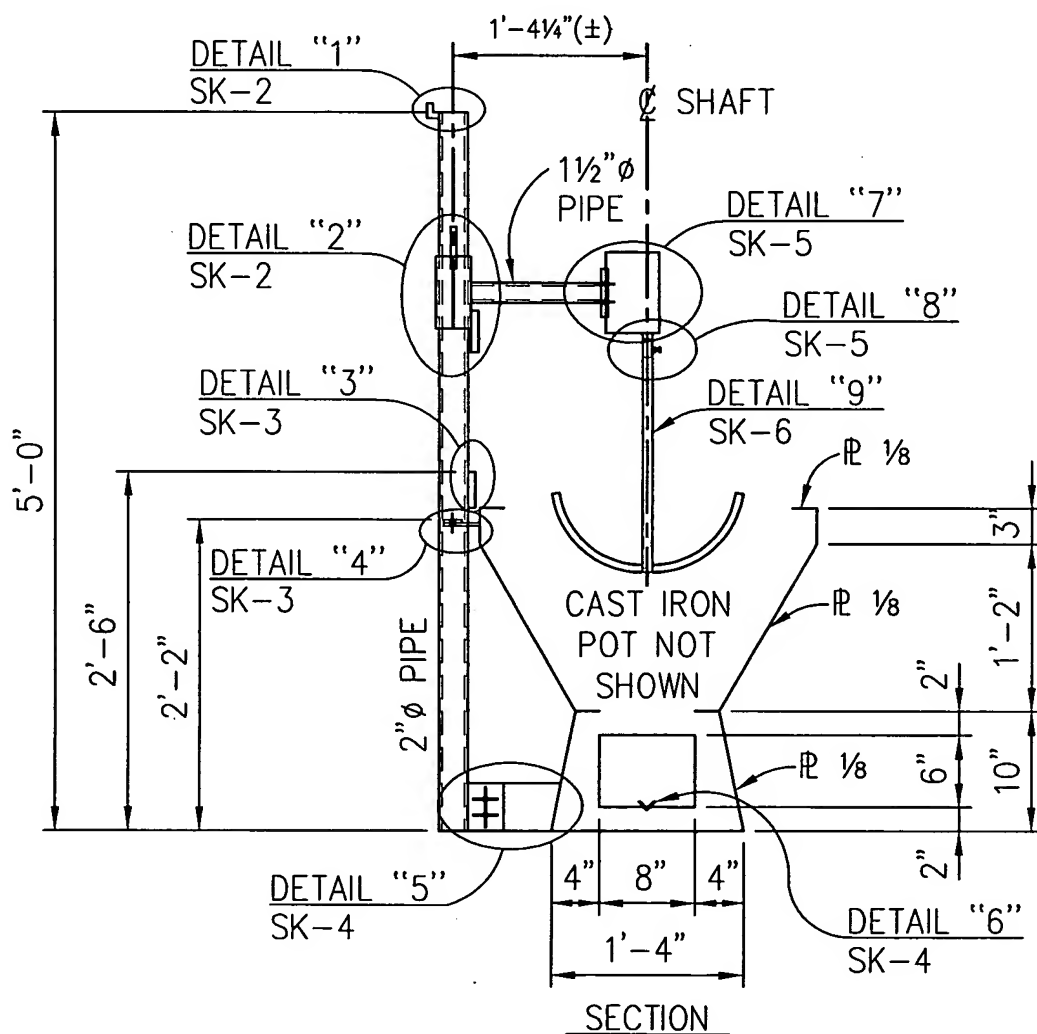


SHIELDED SELF-STIRRING CRACKLING COOKER

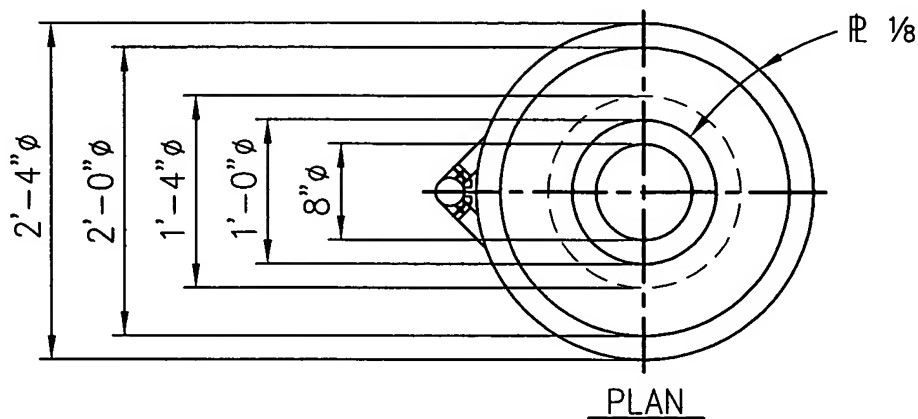

SK-2

UPPER LOCKING RETAINER ON PIPE STAND

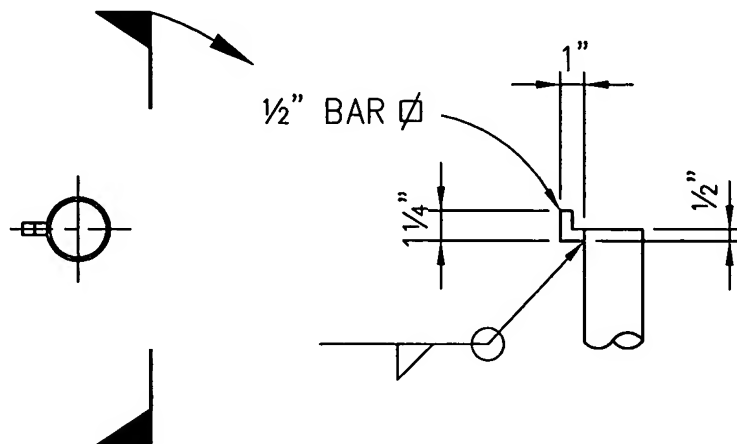


DETAIL "1"

FROM SK-1

SLIDE ARM POSITION RETAINERS

UPPER LOCKING RETAINER
ON SWING ARM SLIDE

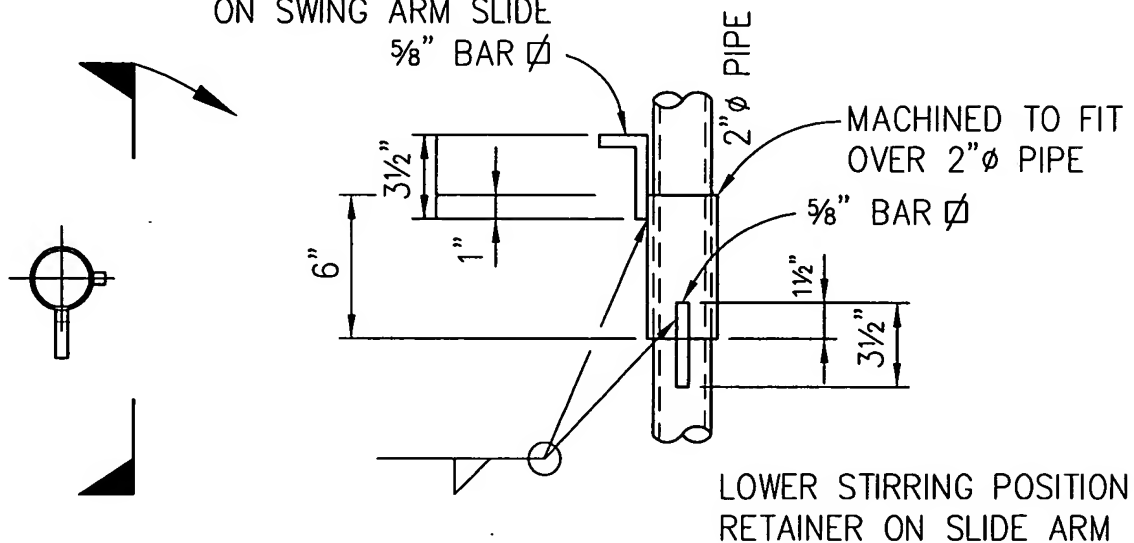


DETAIL "2"

FROM SK-1

SK-3


LOWER STIRRING POSITION RECEIVER

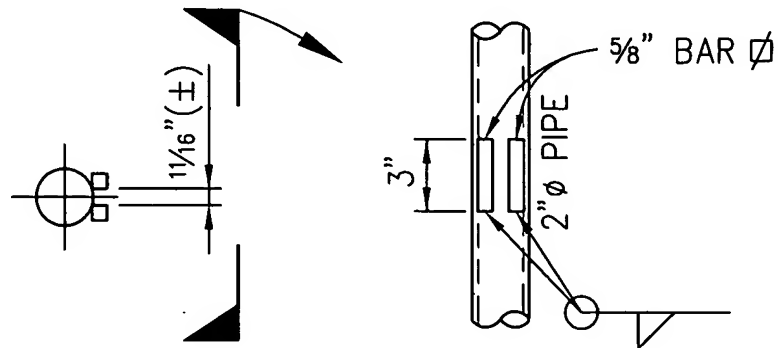

DETAIL "3"

FROM SK-1

PIPE STAND TO SHIELD ATTACHMENT

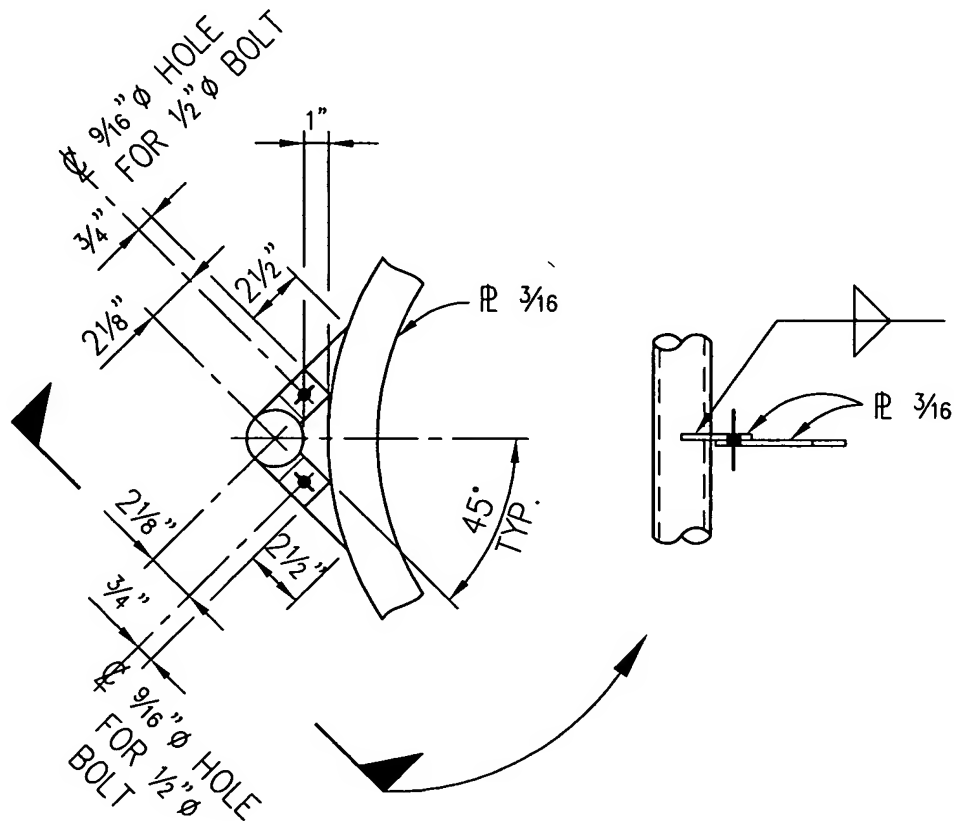


DETAIL "4"

FROM SK-1

SK-4


PIPE STAND TO BOTTOM SHIELD CONNECTION

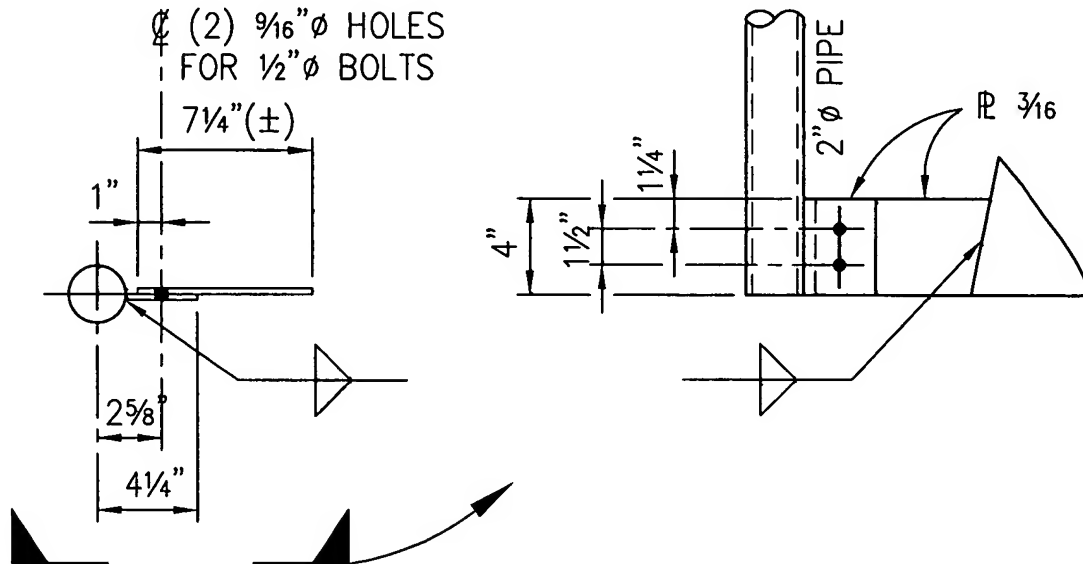

DETAIL "5"

FROM SK-1

BURNER SUPPORT PLATE

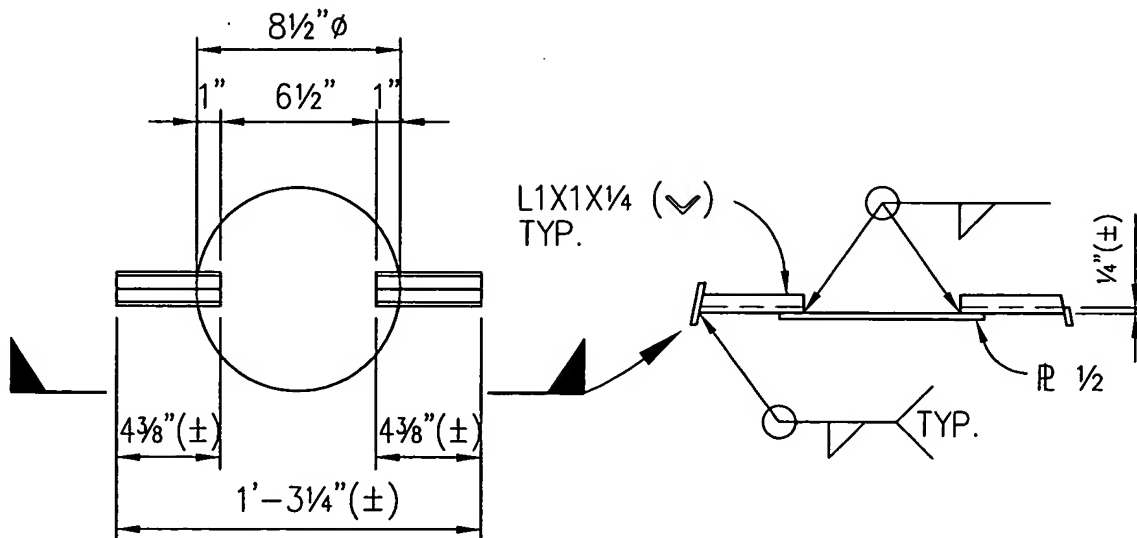


DETAIL "6"

FROM SK-1

SK-5

SLIDE ARM MOTOR MOUNT

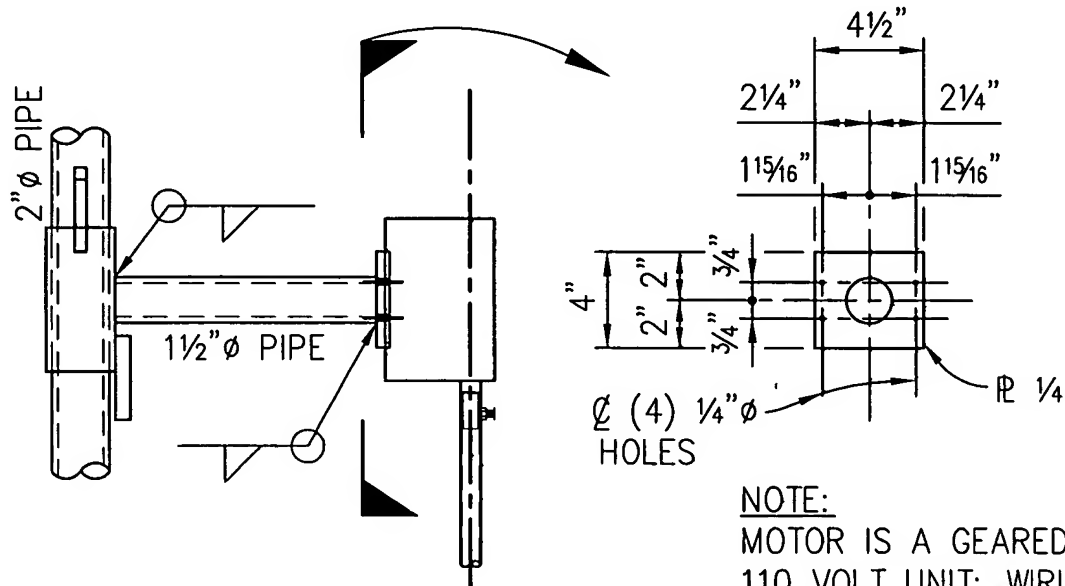


NOTE:

MOTOR IS A GEARED
110 VOLT UNIT; WIRING
IS AS REQUIRED BY USER.

DETAIL "7"

FROM SK-1

SELF-STIRRING ROD TO MOTOR SHAFT


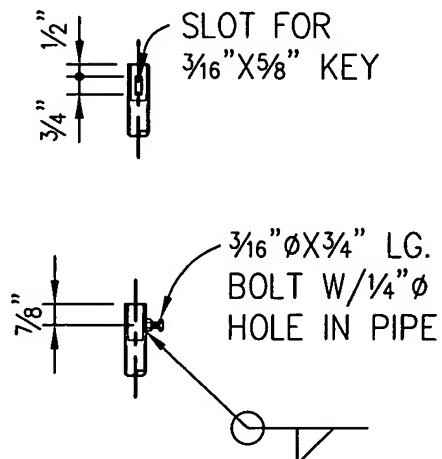


DETAIL "8"

FROM SK-1

SK-6

SELF-STIRRING ROD

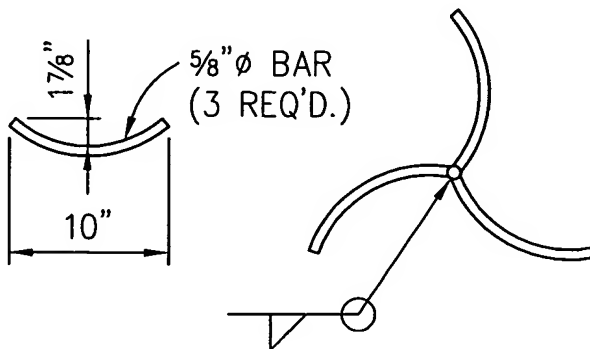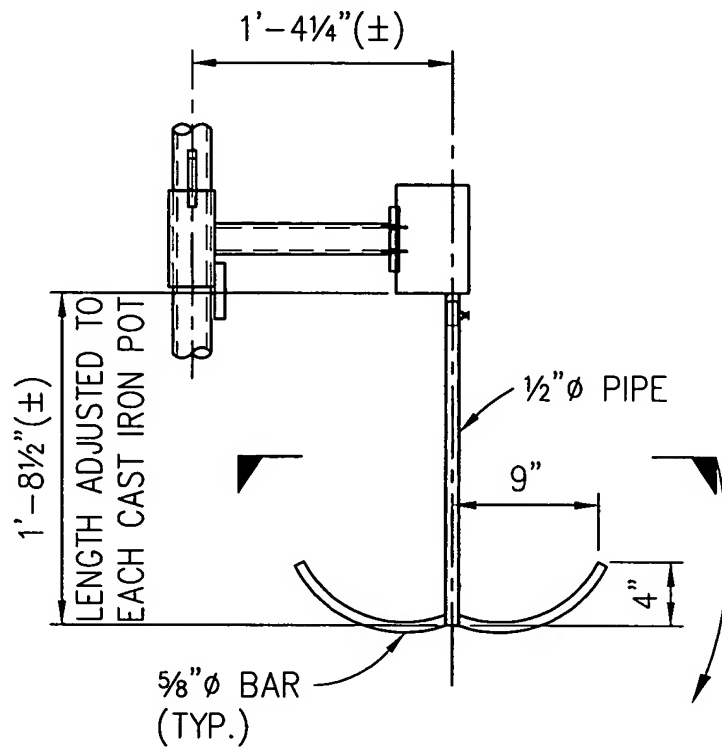

NOTE:
CENTER LINE OF CURVE IN
BARS IS ROLLED AT 45° OFF
OF CENTER LINE OF 1/2" Ø PIPE.

DETAIL "9"

FROM SK-1